

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 02/071311 A2

(51) International Patent Classification⁷: **G06K 7/00**

(21) International Application Number: PCT/EP01/02571

(22) International Filing Date: 7 March 2001 (07.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **HALPERN, John, W.** [GB/GB]; 15 Jordan Court, Ingram Crescent West, Hove, East Sussex BN3 5NU (GB).

(74) Agents: **HUGHES, Andrea, Michelle** et al.; Frank B. Dehn & Co., 179 Queen Victoria Street, London EC4V 4EL (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 02/071311 A2

(54) Title: MOBILE PHONE COMMUNICATIONS SYSTEM WITH INCREASED FUNCTIONALITY

(57) Abstract: The invention relates to a mobile telephone and a smart card transaction system in combination, where the functionality of a mobile telephone is increased so that the phone can be used in a large range of transactions for which smart cards are normally used. The phone may also be provided with a slot to receive smart cards and re-charge them with funds for cashless transactions, by communicating with a bank account or the like.

- 1 -

Mobile Phone Communications System
with Increased Functionality

5 Whereas the mobile phone market remains buoyant it may
win additional patronage if the communication system and
its devices could relate to the frequently arising need
to interact with a smart card terminal, be it to execute
a purchase or to verify a right to access a predefined
service, or for some other function.

10 However, standard VHF antennas are almost useless to
meet the condition for a transactional data transfer: It
is and must remain a bilateral process. Radio antennas
radiate into all directions, and can also receive from
15 all directions.

20 The present invention has as an objective, the
modification of a mobile telephone to increase its
functionality. The modified telephone may be used in
e.g. point of sale and access control transactions.

25 GB 2321551 discloses power transfer using a twin-loop
antenna configuration capable to operate in-phase and in
anti-phase. The adaptation of the principle to mobile
phones makes extra demands and calls for additional
inventive effort. For example, if the particulars of a
travel entitlement, or of a routing instruction have to
be surveyed quickly, the display area needs to be larger
than that normally provided by a mobile phone device.
30 Again, this objective must be attained without making
the "pocket size data carrier" clumsy to use.

35 It will be seen from the description that various modes
are feasible. In the foreground are concepts for
dividing the device into two parts linked by a hinge or
a piece of flexible material as disclosed in GB 2348521.
Then, the question arises, how to convey the signals

- 2 -

from the microprocessor to the display screen? Could some fibres of the flexible material be used as a conductor? this invention includes proposals to this effect.

5

In accordance with one aspect of the invention, there is provided a carrier for information and selective information exchange and communication with an external processing device; said carrier comprising two parts, the first part being substantially flat and comprising integrated electronic circuitry and data input means arranged on its surface, the second part having substantially the same dimensions as the first part and comprising display means;

10 the first and second parts being hingedly connected together by a flexible insulating sheet material attached to both parts; and wherein the first and second parts are electrically connected by one or more bundles of wires embedded in said flexible insulating sheet material, said wires adapted to provide power to said display and to transmit signals from said data input means and said display.

Still another aspect is being dealt with in this description: The traveller often needs information about the locality of his immediate surroundings which cannot be provided by the Mobile Phone Service Operator. In such cases, it is anticipated, public terminals will be available for consultation. These may be at a Railway Station or in a Park, or in a street with bad lighting. Traditional LCD screens cannot be read in darkness, or dull light.

I propose a simplified solution for using tiny LED diodes as the Pixel elements from which any display is assembled. This would make the Display luminous, readable day and night. Thus, in accordance with

35

- 3 -

another aspect, the invention provides an electronic display system utilising a digital communication network and based on LED display techniques, comprising diode pixels which have applied to them a bias voltage

5 differential V_1 which is below the trigger voltage V_0 (at which the individual pixel becomes light emitting) and wherein there is a third electrode (the trigger electrode) for each pixel connectable to the stream of serial data pulses from the said communication network

10 which raise the voltage pulse level above V_0 , and wherein the crystal substance of the display pixels is infused with preferably photo-sensitive impurity elements capable of releasing fresh free electrons into the space charge of the crystal matrix as soon as light emission

15 begins resulting in a stable lowering of the said initial threshold voltage V_0 to a new level V_2 which, being below V_1 , permits the selected pixel to remain alight after the respective data pulse has gone, until such time as the applied voltage differential V_1 is

20 further lowered or altogether removed from all the pixels of the display in general.

It is also desirable to increase the functionality of a mobile phone to enable it to be used for other

25 applications. In accordance with another aspect of the invention, the mobile phone is adapted to communicate with a smart card reader so that it can be used in transactions which can normally be carried out using a smart card.

30

In accordance with another aspect of the invention, the mobile phone has means for receiving a smart card, means for communicating with a financial account remote from said mobile phone; means for transferring information

35 relating to a value of money from said account to said smart card.

- 4 -

In accordance with another aspect, there is provided a mobile telephone comprising a coupling loop and an oscillator circuit adapted to emit a standard frequency used in contactless cards; means for receiving messages
5 via the telephone network; means for tuning said coupling loop; and a slot adapted to receive a smart card; the mobile telephone further comprising means for adjusting the resonance point of the combined inductance of the coupling loop and a loop in an inserted card;
10 further comprising an oscillator source whose frequency is adaptable to the frequency of communication of smart contactless cards, said oscillator source being applied to said coupling loop in the same modulation mode as the VHF signal received by the antenna of the mobile
15 telephone.

Preferred embodiments will now be described, by way of example only, with reference to the drawings.

20 Figure 1 shows a prior art data carrier with a keyboard to which is hinged a display window.

Figs. 2 and 3 are new modifications of the device shown in Fig. 1 adapted such that the transmission of data
25 from the micro-processor to the display electronics no longer poses a problem.

Figure 4 illustrates the possibility of converting a standard mobile phone from strictly local data transfer
30 events by adopting a three-branched kind of antenna, with the silicon wafer placed into the middle branch.

Figure 5 illustrates an access control operation in which the usually used card is replaced by a mobile
35 phone using the antenna configuration of Fig. 4.

Figures 6, 7 and 8 explain the limitation of a

- 5 -

conventional light emitting diode, and the changes of performance such as would be desirable for a luminous display.

5 Figure 9 gives details, including a trigger electrode as used in a modified LED diode.

Fig. 10 shows a grid of tiny LED diodes each measuring only 0.65 x 0.65 mm.

10

Fig. 11 provides an idea of the way in which the data are processed in order to obtain a meaningful display.

15 Fig. 12 shows how the dual loop antenna connects to the computer chip, and to the display drive circuits.

Fig. 13 shows a detail in connection with FIGURE 14, namely how the data input received by a mobile phone antenna is converted into the signal form which a
20 contactless smart card is capable of receiving during an update of the contact-less card when placed into a slot in a mobile phone device.

25 Fig. 14, 15 and 16 provide views of a proposed mobile phone such as may mainly be used for data transmission and for updating a contact-less card, but occasionally does require direct audio communication before or after text transmission.

30 Fig. 1 is a device such as disclosed in GB 2348521, and is largely self-explanatory, providing the starting point from which Figs. 2 and 3 were developed. Fig. 2 shows the "travel pass" in its folded condition. It should be said in passing that in this condition the
35 data carrier can carry out purchase or access functions in transactions with a contact-less terminal. There is no need to unfold the device as shown in Figure 3,

- 6 -

except when the details of a transaction are to be viewed.

5 The actual detailed execution of the electrical connections between the device memory and the display will depend to a large extent on the display technology selected and whether the display is intended for alpha-numeric readout, or has to include graphic material, as well as parts of road maps, geography of a building etc.
10 Furthermore, it will depend on the precise nature of the contactless interface with a card reader.

One specific example will now be described with reference to figures 2 and 3. The flexible connection
15 strip extends over the full vertical dimension of parts 1 and 2, and also serves as the means for holding these two parts together, either alone or in combination with a conventional hinge as shown in Fig. 1.

20 Figures 2 and 2a represent the front and side views of the folded 'travel pass'. From the side view (seen from A-A) it is clear that the flexible cover 18 extends over the width of part 1 and of part 2. The two parts are latched in the closed position by means of spring-loaded
25 steel balls 20,21 although any other form of latching could be used. As shown, the metal balls 20,21 are at the end of hardened springy wire portions 20a,21a respectively. These are laid into recesses of the plates 1,2 respectively, allowing them sufficient play
30 so that the metal balls can be elastically displaced during latching. Lines 1z, 2z indicate an alternative form such that the metal balls are supported, preventing slippage.

35 Figures 2a and 3a are respective side views seen from A-A, and B-B respectively. The rigid portions, the keyboard part 1 and the display part 2, are covered by

- 7 -

and bonded to a flexible quasi-fabric sheet 18 into which are embedded thin metal alloy wires. These wires connect the electronics of the two parts. THIS will be explained in conjunction with a specific example in connection with figures 6 to 12. It remains to explain the functions of the keyboard buttons. - On the far upper left, there are two keys marked pr and bu. By means of these, the user may quickly enter a flag concerning any purchase he/she makes as being either private(pr) or business-related(bu). One of the programs permits the display of all the business expenses of the day, another all the private expenses of the day. other programs allow the categorisation of the expenses if a further brake down is required. In a business context, these categories will apply to all employees but may also be adapted to more individual requirements. The keys marked alpha, beta, gamma produce totals of discounts saved with three Stores named alpha, beta, gamma (see also the document WO93/02430).

A thin card-like battery 17 can be of the replaceable or re-chargeable type. Because of the use of a dual-loop antenna which is capable of receiving considerably more power than the plain radio-type antenna, it is feasible that the battery will serve as an energy buffer and equaliser, and would not require external recharging. In other words, the topping-up battery may become a permanent or semi-permanent part of the device.

There is also the possibility of mounting most, if not all of the display electronics on the flexible carrier sheet 18. This would be facilitated if this sheet consisted of several distinct layers. Flow solder jointing of pads on different surfaces can be utilized for joining the connector pads.

Turning now to Fig. 6, item 30 symbolises an LED cell or

- 8 -

pixel such as is here proposed might be developed to produce a luminous display with a minimum of control electronics. The idea is to aim at the development of a light emitting diode which can be kept alight at a voltage considerably lower than the initial or trigger voltage. This is illustrated in Fig. 7. In terms of an inner resistance R (see/ Fig. 8), it remains relatively big until the voltage reaches a trigger level. After that, the internal resistance drops considerably. To those who are experts in semiconductors, a solution for producing such a diode is likely to occur. One suggestion I have is to incorporate photo-electric components into the LED structure. After the diode's conductivity is triggered, the diode emits light, and in emitting light it would reduce its internal resistance further because of the presence of photo-electric components or atom combinations, and thus the condition of light generation would tend to become permanent at the lower voltage level. However, as and when the switch 23 substitutes the negative connection by a positive connection (Fig. 6), the diode relapses into its original state. This switch 23, therefore, when applied to all the diodes of the display, will darken the picture in preparation for the next scanning frame. If the change-over is fast enough (about 20 times a second) it would be possible to use the same technique for the generation of moving displays. The described property of the diode would thus be desirable.

Using such a diode 30 in Figure 9, it has now a square shape with embedded electrodes + and -, and an additional small electrode tr , the trigger electrode. Normally, there is applied a voltage differential across the main diode electrodes which is too low to light the LED. The non-inverting amplifier 31 produces a floating output or rather no output at all to the trigger electrode tr , except the enable input 'e' is high. Then,

the diode flares up and, because of the designed condition, remains alight. The said enable input becomes high only at the moment when the two scanning counters provide a pulse to the AND gates 19 row and 22 col, and in addition there is also a high data pulse (derived from the microprocessor driven by the antenna, or by a program register, that must be high at the very same pulse-moment. If therefore the data pulse is missing, no pulse will reach the enable point 'e', and the LED pixel concerned remains dark. For those LEDs which do receive the treble pulse simultaneously, the LED pixel will light up and remain so, until the general display-RESET switch 23 is activated. THIS can be either a manual switch or part of the general program to be displayed.

Figure 10 is a presentation of the square diodes (LEDs) as seen about forty times enlarged on a substrate, on which there are also deposited the plus and minus rails 14 and 15 alternating and indications of the aforementioned AND gates and the trigger electrodes tr. In the opinion of the author, it should be possible to generate this relatively simple and repetitive structure on the basis of integration techniques already available, in order to produce this type of display fairly inexpensively. This would be the objective of further development work.

Figure 11 shows the arrangements of the Johnson Scanners 9-row and 19-col once more to the left and to the top of the Display Area on a larger scale. These components are placed on the rigid substrate 2 behind which the flexible connector fabric 18 is bonded on.

FIGURE 12 shows once more the dual loop antenna 11 with its two central links 11a which converge to power up the silicon chip 12, and also receives the modulated data bits. These are demodulated in the chip circuit and

- 10 -

placed into the buffer registers in accordance with preprogrammed routines or protocols. If these data have to be displayed, they will be converted into a serial stream and applied to the individual pixels of the display area as explained, producing images or printed matter or hand-written notes.

Figures 4, 5 and 13 relate to the third aspect of the invention. Figure 13 is of special importance because it indicates the design features of another aspect of the invention which makes possible the up-dating of a contact-free smart card (such as will be used in large public transport systems) via mobile telephone. The update amount must be obtained via a bank account and be placed into a secure register of the mobile phone. THEN, a contact-free smart card 60 is placed into a slot of the mobile telephone and the process of data transfer can begin.

GB 2,291,724 discusses the potential value of the telephone network in the practical realisation of a stored value card system used e.g. for cashless paying of fares on public transport etc. The cards can be replenished or topped-up before the stored value is completely used up, via e.g. a card reader or automated cash dispenser machine.

The use of smart cards as entitlement or access permission devices is also described in UK patent application 9920616.1.

In accordance with this aspect of the present invention a mobile phone is modified to provide the capability of topping up such stored value or access control cards via the user's mobile phone, meaning that the card can be updated wherever the user happens to be.

- 11 -

The invention is preferably in the form of a mobile phone that fits into a shirt pocket or the like and that can double as a 'travel pass' with all the transactional and informational capabilities described in the above mentioned patent and application. This aspect of the invention also provides the mobile phone with the capability of updating a contactless card.

Figure 13 explains how the mobile phone antenna 40 is connected to an HF diode detector 43 and, via a filter stage 44,45 to the gate of a transistor 46. The same is also connected to an oscillator 47 generating oscillations at one of the standard frequencies for contactless cards, say 13.56 Megahertz. If the amplitude modulation of the carrier wave is adequate, bursts of power representing binary data at the above named frequency will be applied to the wire loop 50 supplementarily tuned by a capacitor 50a, so as to resonate and give maximum output. When a smart card is now placed in such a manner close to the loop 50 that the card loop 61 forms a closely coupled pair, there will be adequate transfer of energy. If there is no card present, the resonance point of the loop 50 would be at a somewhat higher frequency above the input frequency. However then the required power level would also be lower, since the card need not be powered up. In either case, the content of the digital data is displayed on the large mobile phone window 5,5a (Fig. 14).

In Figure 14, the mobile phone antenna bit, or respectively the dual-loop antenna as shown in Fig. 4, is not shown and should be assumed to be housed within the overall shell 1. Equally the circuitry of the signal source (47, in Fig. 13) and the modulation mode adaptor (48) with its presetting means (48a) are accommodated within the shell 1. Service personnel in

- 12 -

the shops where that phone can be obtained would of course be instructed concerning the simple steps that are required to preset the phone to the type of card which the customer processes.

5

Some phones would have a slot into which the contactless credit card of the customer can be placed. Other phone versions may be made, that develop adequate power so that the card may be stuck into a little recess or simply placed on the phone for establishing the necessary close vicinity coupling loop between card and phone to transfer fresh data into the card.

10

The top row of buttons are marked 'c', 's', 'p' and 't'.
c= cancel; s= summing operation e.g. all purchases of a list of categories that can be addressed in an upper case memory plane. In that memory, purchases of one kind will be found and the push button s will be pressed if only the sum of all purchases of that category should be displayed. Next, the button p= password, meaning a preset password is generated. This is used if required to increase confidentiality of an already encrypted data transmission. This is, thus, different from the PIN, which altogether enables the mobile phone to give any service whatsoever. The buttons with the left and right pointing arrows will serve to selectively delete a letter or character, and for other scrolling etc, purposes. The bar buttons marked I, II, III produce direct access to the memory record of three accounts relating to different banks or other institutions. In the upper row of five buttons in a line, DB specifies access to the debit account of one of the three accounts; CR specifies a credit account of those accounts; U shifts the reference plane of any selected button.

20

25

30

35

The large display area is covered by a relatively thick

- 13 -

glass plate that cannot easily be scratched. This plate 5,5a would be safely held by the frame 1 and must withstand the pressure of a strong hand holding the device. It must be a high quality glass or glass and plastics combination to remain without abrasions for a long period of time.

The microphone is housed within the shell, but holes 70 permit the user's voice to be transmitted to a station attendant, conversation partner etc.

Figures 14 and 15 show the front and side view of the device, and more particularly clarify the use of a semi-permanent fixation of the ear-piece 65. To ensure good reception, the ear-piece is pressed into the user's ear. As Fig. 15 shows, the ear-piece 65 is held by a robust plug-in piece 65a, which fits precisely into a structural element so that it is not subject to wobbling or turning. The entire handheld device can be handled easily, so that the ear-piece fits the ear.

Finally, Fig. 16 gives a partial view of the device (View A-A) illustrating the slot 60 through which the contactless smart card 60a can be inserted. It may be important that the system prevents simultaneous entries into the memory of the mobile phone. This can be done e.g. electronically by not allowing the PIN of the card to be the same as the PIN of the mobile phone. If the PINs are identical, then no transaction may be carried out. If they are different, the update transaction can be carried out in the memory of the card or the phone. Finally, this modified phone can be used also for audio connection, for example when an officer of the customer's bank has to be spoken to. For instances like this, the ear piece 65 has been provided. Its main feature is the shaft 65a which has a precision fit in a corresponding holder in the main body 1 of the mobile

- 14 -

phone, producing both mechanical rigidity and good electric contact for the built-in phone leads. The main specification is that the connection system must be free from wobbling movements, and, once set, there should be no movement of the ear piece insert. On the other hand, the user will find that the unaccustomed form of the ear piece will soon be accepted by the public, or at least by that part of the public who knows the value of brevity in business conversations.

10

From the point of view of security, the following specifications must be enforced:

(a) the PIN members for the mobile phone and for the smart card must be different ones.

15

(b) When the PIN of the smart card is chosen, it would be only the smart card that is updated, but not the financial section of the mobile phone.

20

(c) Vice versa, when the Mobile Phone PIN code is used, only the Mobile Phone receives value, and not the smart card, even when inserted into the phone.

- 15 -

CLAIMS

1. A carrier for information and selective information exchange and communication with an external processing device; said carrier comprising two parts, the first part being substantially flat and comprising integrated electronic circuitry and data input means arranged on its surface, the second part having substantially the same dimensions as the first part and comprising display means;
- the first and second parts being hingedly connected together by a flexible insulating sheet material attached to both parts; and wherein the first and second parts are electrically connected by one or more bundles of wires embedded in said flexible insulating sheet material, said wires adapted to provide power to said display and to transmit signals from said data input means and said display.
2. The carrier of claim 1, wherein said flexible insulating sheet material comprises a plurality of layers, and wherein at least one of said layers carries a twin-loop antenna on which a computer chip is bonded.
3. An electronic display system utilising a digital communication network and based on LED display techniques, comprising diode pixels which have applied to them a bias voltage differential V_1 which is below the trigger voltage V_0 (at which the individual pixel becomes light emitting) and wherein there is a third electrode (the trigger electrode) for each pixel connectable to the stream of serial data pulses from the said communication network which raise the voltage pulse level above V_0 , and wherein the crystal substance of the display pixels is infused with preferably photo-sensitive impurity elements capable of releasing fresh free electrons into the space charge of the crystal

- 16 -

matrix as soon as light emission begins resulting in a stable lowering of the said initial threshold voltage V_0 to a new level V_2 which, being below V_1 , permits the selected pixel to remain alight after the respective data pulse has gone, until such time as the applied voltage differential V_1 is further lowered or altogether removed from all the pixels of the display in general.

4. A mobile telephone comprising a coupling loop and an oscillator circuit adapted to emit a standard frequency used in contactless cards, said telephone adapted to transmit signals to such a card, said telephone comprising:

means for receiving messages via the telephone network;

the mobile telephone further comprising means for adjusting the resonance point of the combined inductance of the coupling loop and a card coupling loop when said telephone and said card are in communicating relationship; further comprising an oscillator source whose frequency is adaptable to the frequency of the carrier signal of said smart contactless card; and

means for translating said messages into signals using the same modulation mode as that of the card carrier signal.

5. A mobile telephone comprising a coupling loop and an oscillator circuit adapted to emit a standard frequency used in contactless cards; means for receiving messages via the telephone network; the mobile telephone further comprising means for adjusting the resonance point of the combined inductance of the coupling loop and a card coupling loop of a card in communicating relationship with the telephone, the telephone further comprising an oscillator source (47) whose frequency is adaptable to the frequency of communication of smart contactless cards and whose modulation mode is adaptable

- 17 -

to the specification of said card, the telephone further comprising a coupling loop (50) tuneable (50a) to the midpoint of the combined resonance of said loop and the card antenna loop when the card is placed into its
5 coupling condition in relation to the phone.

6. A mobile telephone according to claim 4, further comprising a separate ear-piece adapted to be electrically attached to the audio circuitry of the
10 telephone.

7. A mobile telephone according to claim 4, 5 or 6, further comprising a slot adapted to receive a smart card.
15

8. A mobile telephone as claimed in any of claims 4, 5, 6 or 7, further comprising means for storing a plurality of modulation modes corresponding to standard card modulation modes, such that the modulation mode of
20 the telephone can be preset to one of said standard modulation modes.

9. A mobile telephone as claimed in any of claims 4 to 8, further comprising security means so as to prevent
25 value data conveyed from a bank to said phone being transferred simultaneously to the card to a memory of the phone.

10. A mobile telephone having means for receiving a smart card, means for communicating with a financial
30 account remote from said mobile phone; means for transferring information relating to a value of money from said account to said smart card.

1 / 9

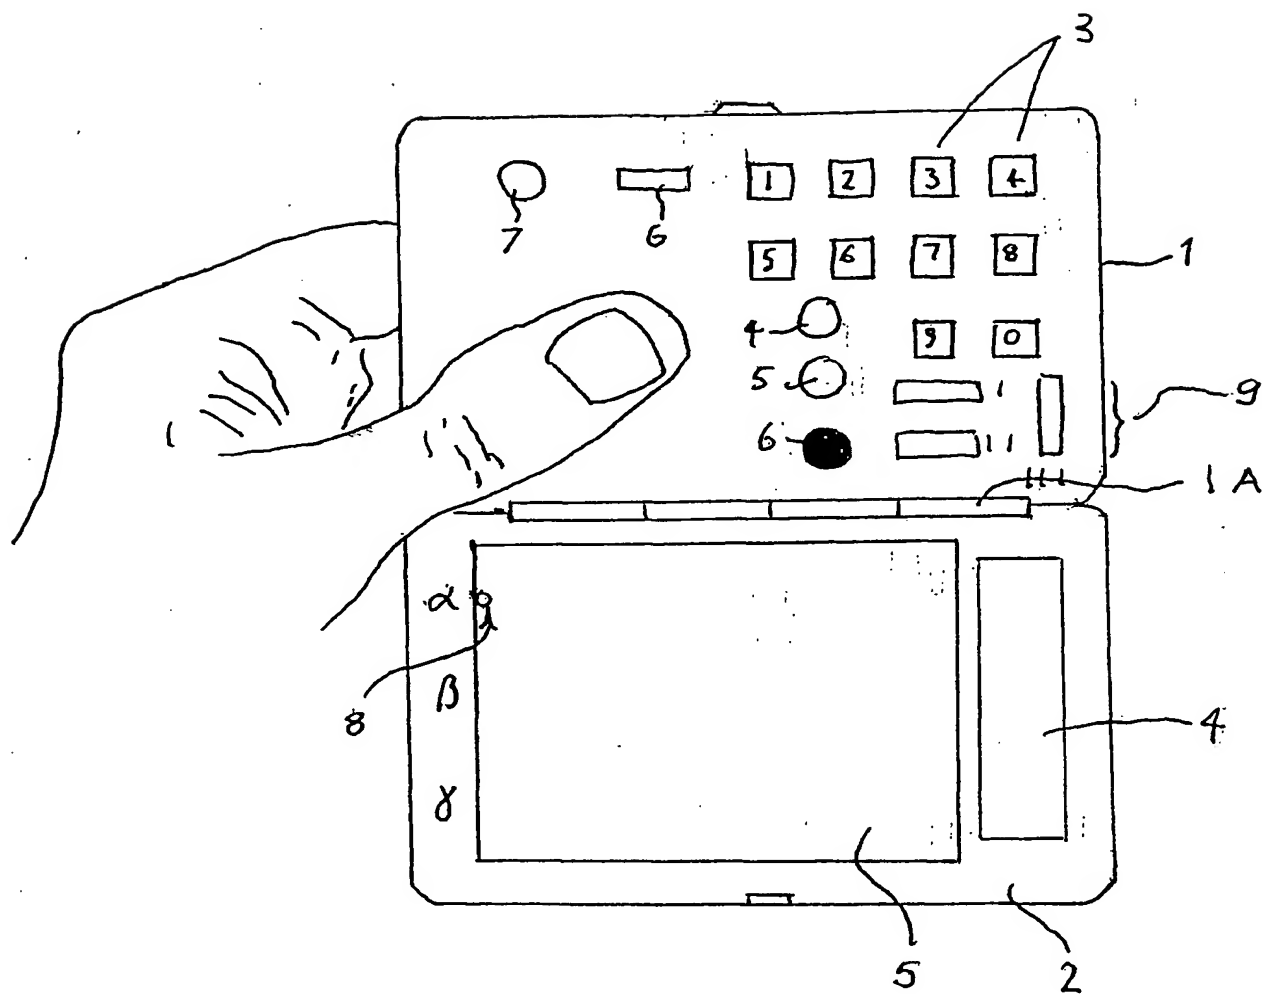


Fig 1

SUBSTITUTE SHEET (RULE 26)

2 / 9

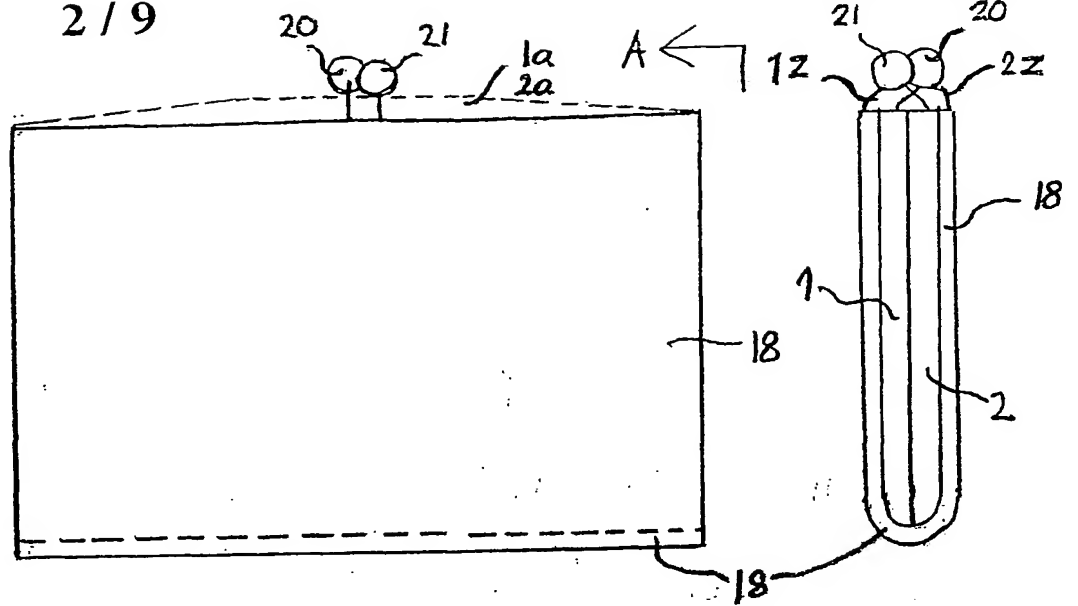


Fig 2

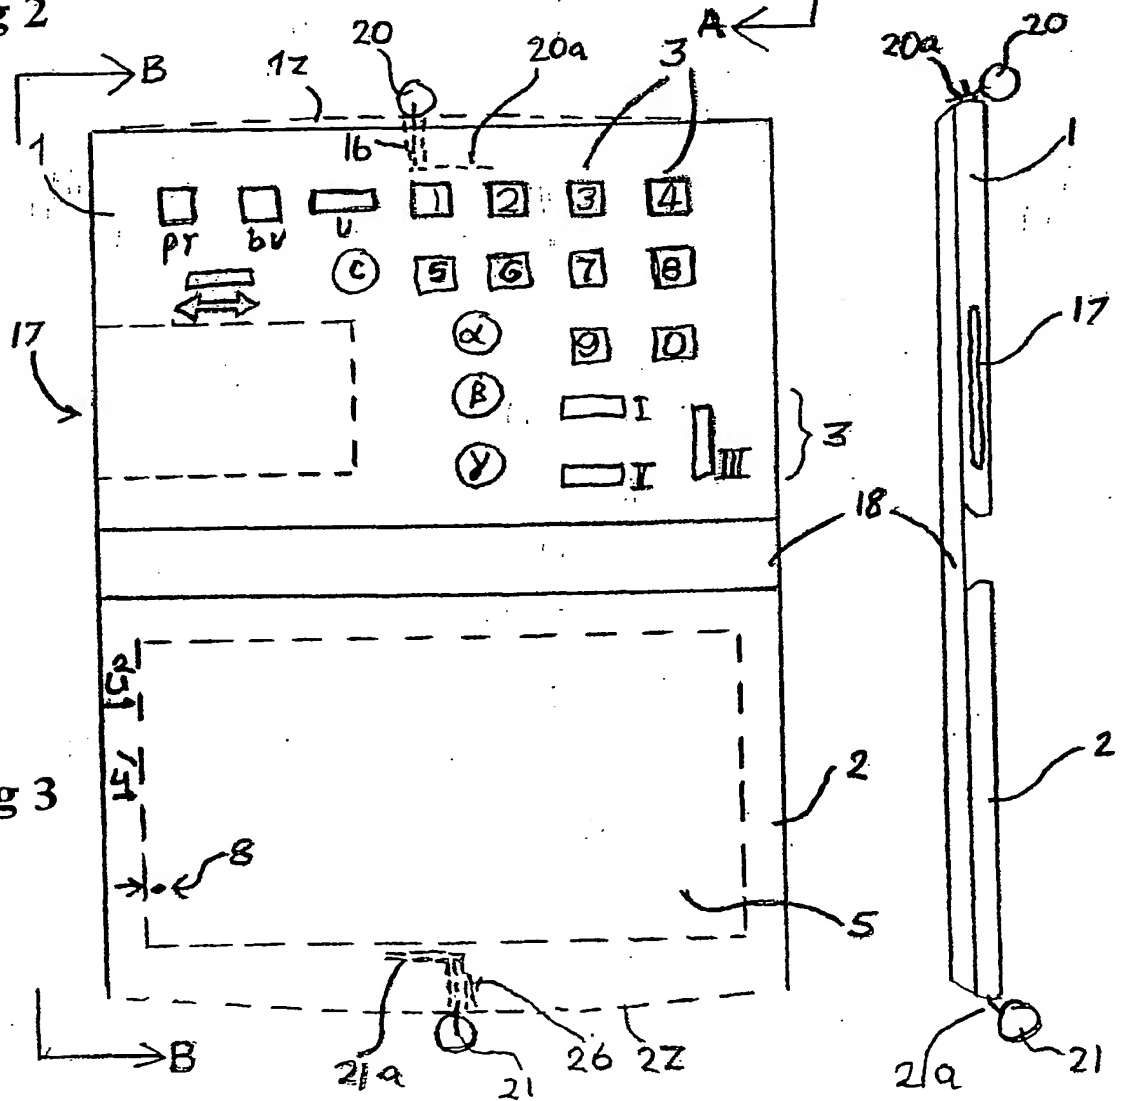


Fig 3

SUBSTITUTE SHEET (RULE 26)

3 / 9

Fig 5


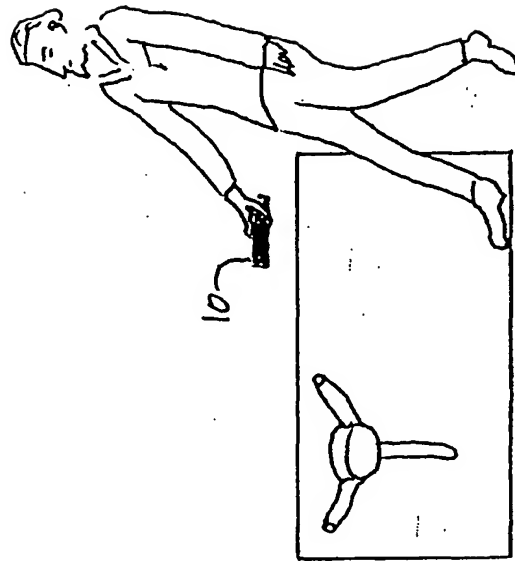


Fig 4

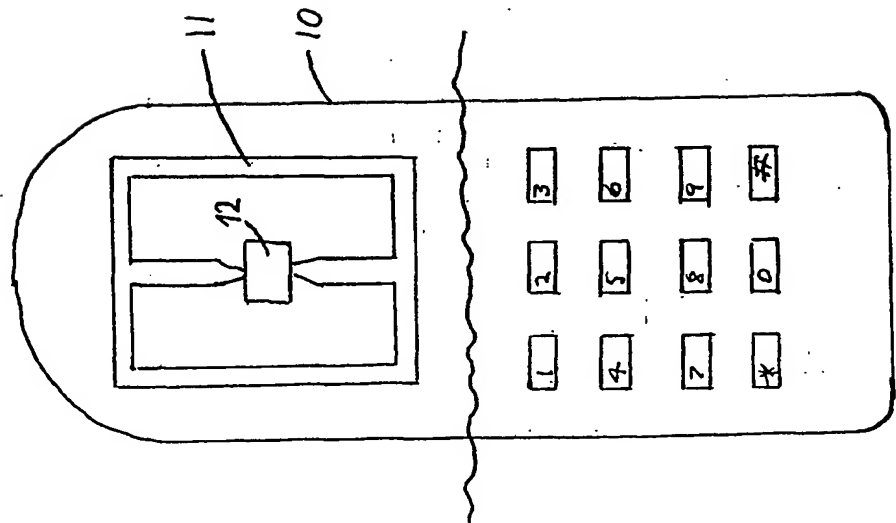

SUBSTITUTE SHEET (RULE 26)

4 / 9

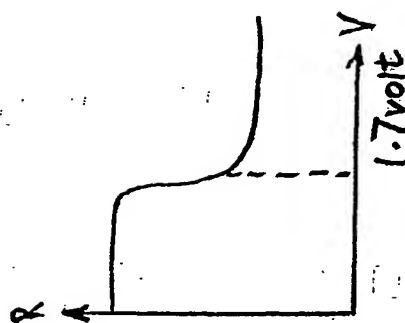


Fig 8

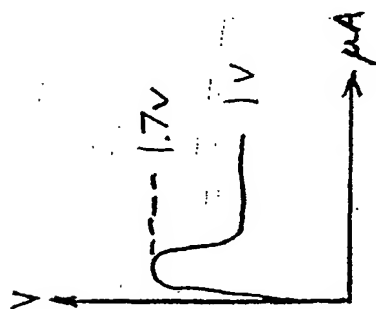


Fig 7





Fig 6

5 / 9

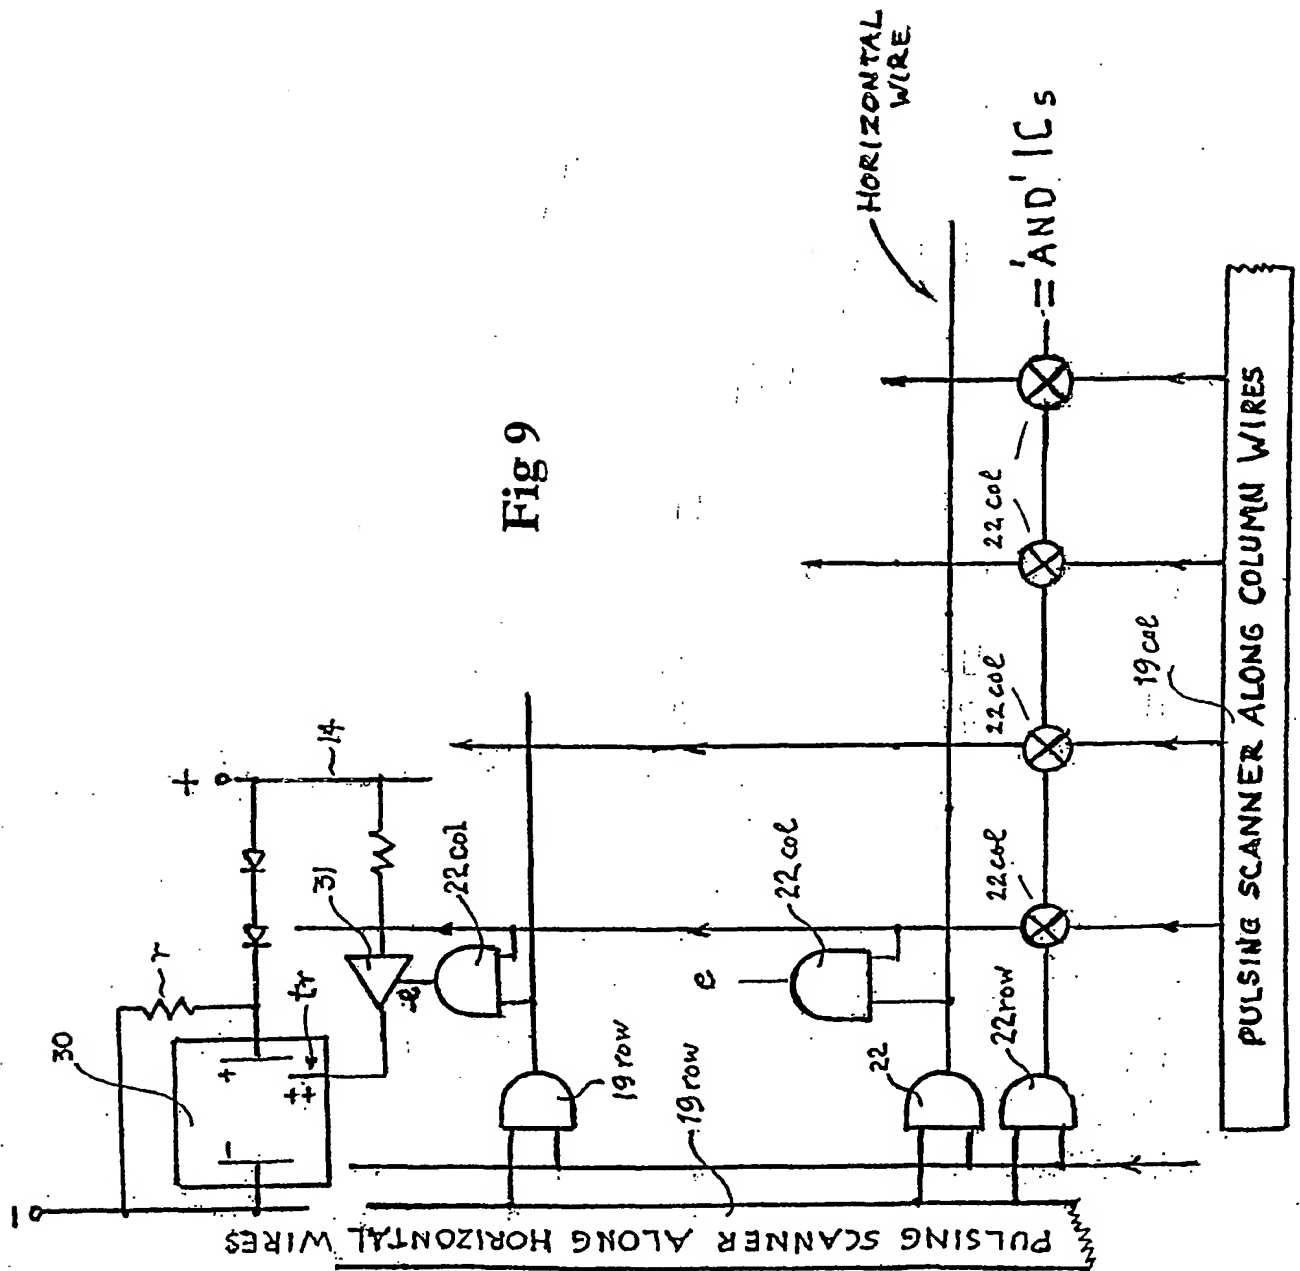

SUBSTITUTE SHEET (RULE 26)

6 / 9


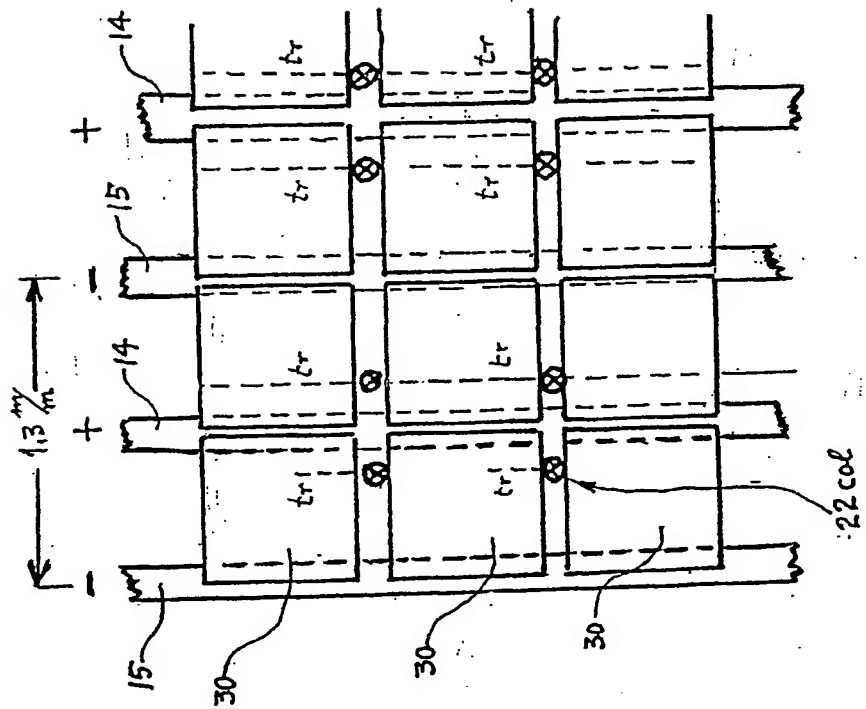


Fig 10

SUBSTITUTE SHEET (RULE 26)

7/9

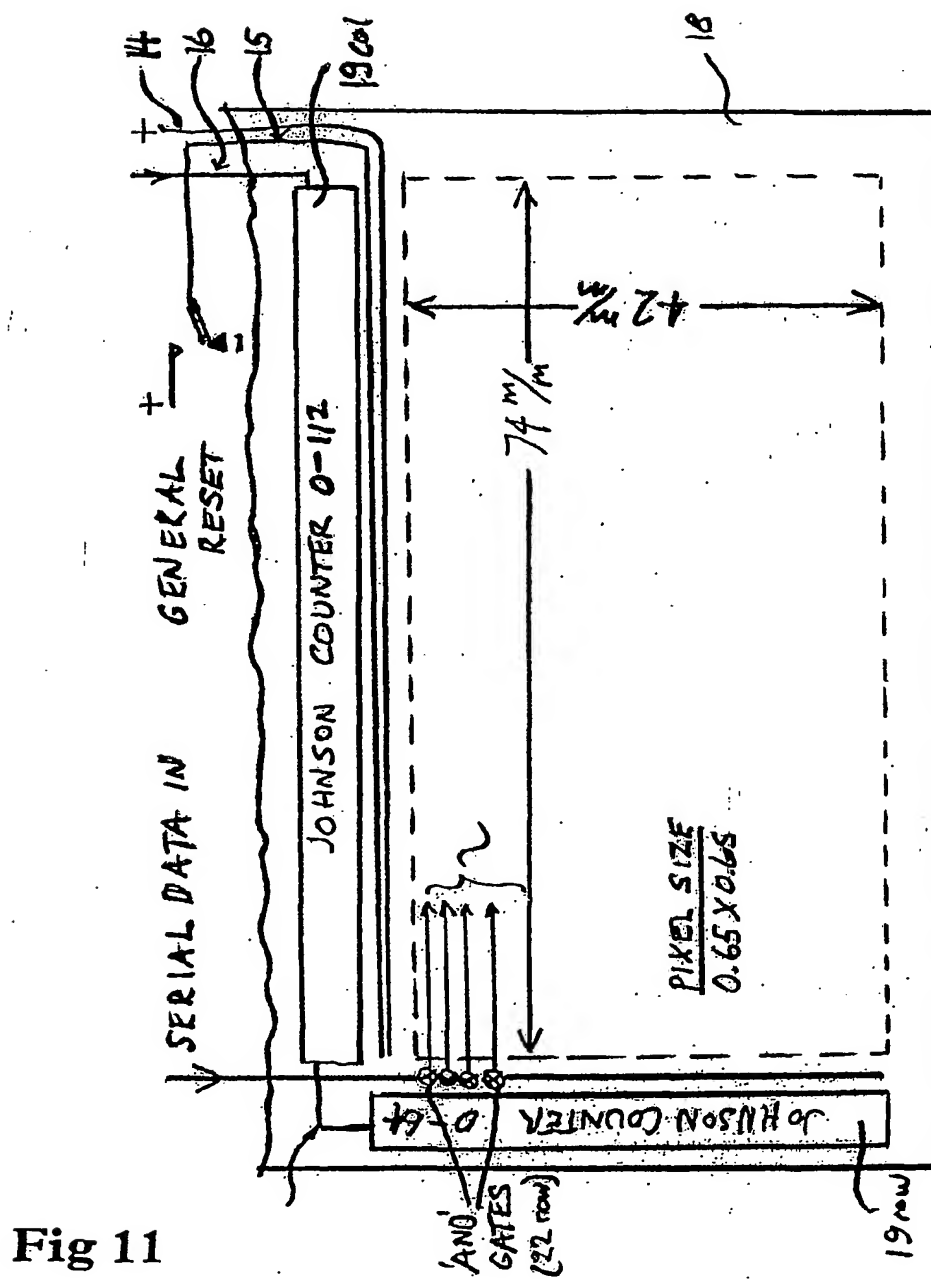

8 / 9

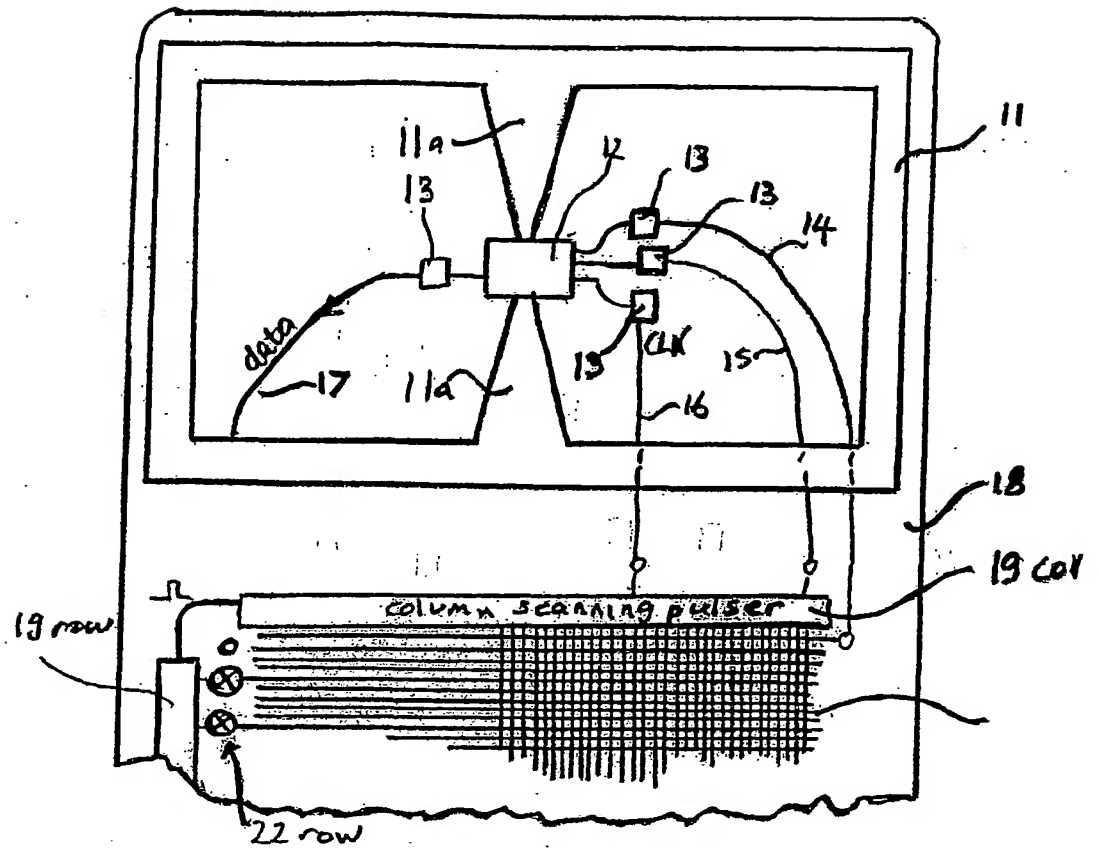


Fig 12


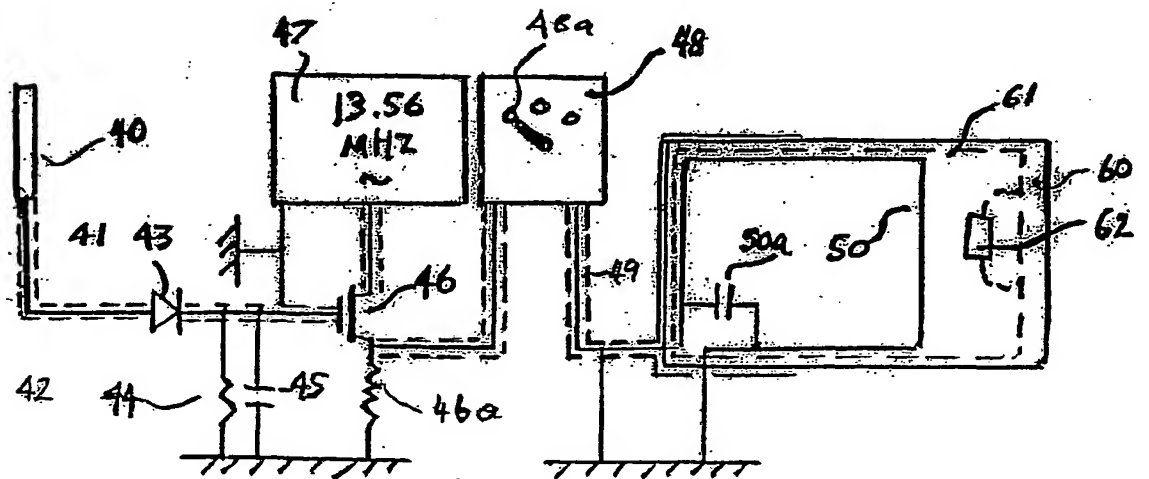


Fig 13

9 / 9

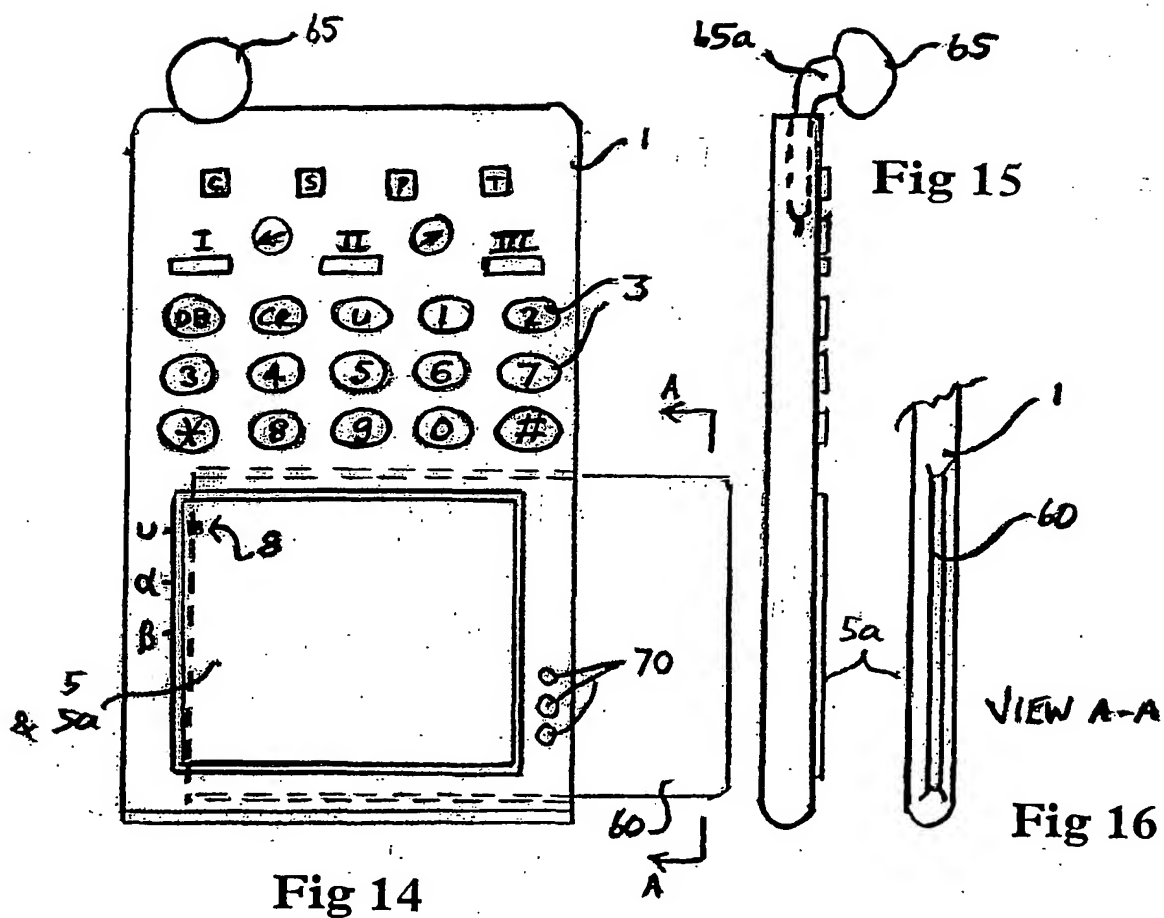

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2002 (12.09.2002)

(10) International Publication Number
WO 02/071311 A3

PCT

- (51) **International Patent Classification⁷:** H04M 1/02,
1/725, H05B 33/14
- (21) **International Application Number:** PCT/EP01/02571
- (22) **International Filing Date:** 7 March 2001 (07.03.2001)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant and**
- (72) **Inventor:** HALPERN, John, W. [GB/GB]; 15 Jordan
Court, Ingram Crescent West, Hove, East Sussex BN3
5NU (GB).
- (74) **Agents:** HUGHES, Andrea, Michelle et al.; Frank B.
Dehn & Co., 179 Queen Victoria Street, London EC4V 4EL
(GB).
- (81) **Designated States (national):** AE, AG, AL, AM, AT (utility
model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility
-
- (54) **Title:** MOBILE PHONE COMMUNICATIONS SYSTEM

model), DE, DK (utility model), DK, DM, DZ, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

- (84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

- (88) Date of publication of the international search report:
21 November 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- (54) Title:** MOBILE PHONE COMMUNICATIONS SYSTEM WITH INCREASED FUNCTIONALITY

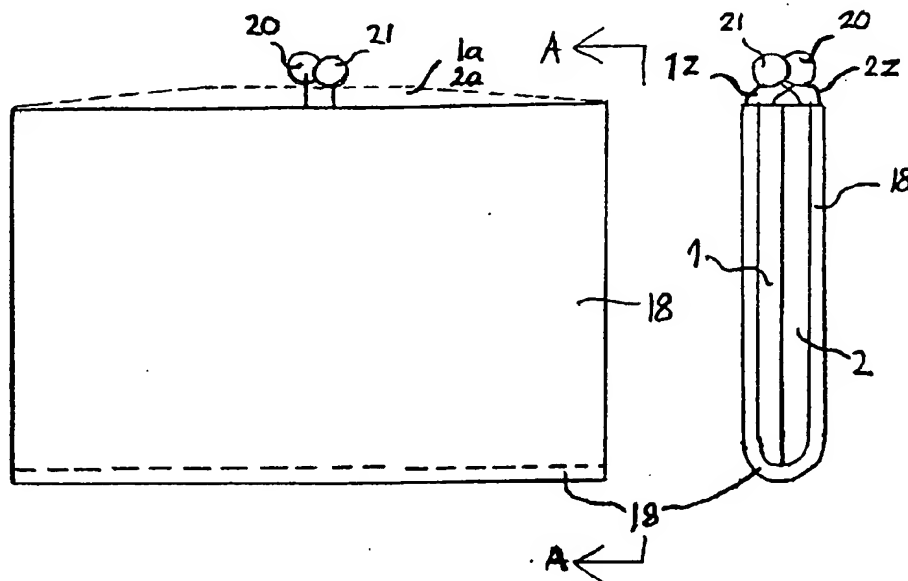

- (57) Abstract:** The invention relates to a mobile telephone and a smart card transaction system in combination, where the functionality of a mobile telephone is increased so that the phone can be used in a large range of transactions for which smart cards are normally used. The phone may also be provided with a slot to receive smart cards and re-charge them with funds for cashless transactions, by communicating with a bank account or the like.

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/EP 01/02571

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04M1/02 H04M1/725 H05B33/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04M H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 675 (E-1648), 20 December 1994 (1994-12-20) -& JP 06 268724 A (HITACHI LTD), 22 September 1994 (1994-09-22) abstract; figures 1,2,6,8	1
X	GB 2 314 179 A (PHILLIPPS JOHN QUENTIN) 17 December 1997 (1997-12-17) abstract page 1, line 24-28 page 7, line 13 -page 8, line 6 figures 9-13	1
Y	---	2

	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

15 August 2002

Date of mailing of the international search report

29. 08. 2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Golzio, D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/02571

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 348 521 A (HALPERN JOHN WOLFGANG) 4 October 2000 (2000-10-04) cited in the application abstract page 2, line 27-33 Amended claims 1 and 2 figure 1	1
Y	US 5 181 025 A (FERGUSON DENNIS D ET AL) 19 January 1993 (1993-01-19) abstract column 2, line 15 -column 3, line 4 figures 1,2	2
X	WO 96 33594 A (CAMBRIDGE DISPLAY TECH ;MAY PAUL (GB); PICHLER KARL (GB)) 24 October 1996 (1996-10-24) the whole document	3
X	EP 0 384 829 A (FRANCE ETAT) 29 August 1990 (1990-08-29) the whole document	3
X	EP 0 820 178 A (MOTOROLA INC) 21 January 1998 (1998-01-21) abstract column 2, line 41-50 column 3, line 5 -column 6, line 44 figures 2-5	4-10
A	US 5 553 314 A (GRUBE GARY W ET AL) 3 September 1996 (1996-09-03) the whole document	4-10
A	GB 2 321 551 A (HALPERN JOHN WOLFGANG) 29 July 1998 (1998-07-29) cited in the application abstract page 3, line 21 -page 5, line 39 figures 1-8	4,5
A	GB 2 331 889 A (NIPPON ELECTRIC CO) 2 June 1999 (1999-06-02) abstract figures 1-4	6
A	WO 98 58509 A (BOUQUET HANSPETER ;RITTER RUDOLF (CH); EIDGENOESS PTT (CH); HEUTSC) 23 December 1998 (1998-12-23) abstract figures 1,2	7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP 01/02571

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-2

A carrier for information and selective information exchange comprising two parts hingedly connected together by a flexible insulating material attached to both parts.

2. Claim : 3

A electronic display system utilizing a digital communication network and comprising an LED display wherein the crystal substance of the diode pixels is infused with photosensitive impurity elements capable of releasing fresh free electrons into the space charge of the crystal lowering the triggering voltage necessary to keep alight the diode pixels.

3. Claims: 4-10

A mobile telephone having means for receiving a smart card, means for communicating via the telephone network and means for transferring information received from the telephone network to the smart card.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/02571

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 06268724	A	22-09-1994	NONE	
GB 2314179	A	17-12-1997	US 6107988 A	22-08-2000
GB 2348521	A	04-10-2000	GB 2353874 A	07-03-2001
US 5181025	A	19-01-1993	NONE	
WO 9633594	A	24-10-1996	WO 9633594 A1	24-10-1996
			GB 2312326 A ,B	22-10-1997
			US 6188175 B1	13-02-2001
EP 0384829	A	29-08-1990	FR 2643488 A1	24-08-1990
			DE 69010712 D1	25-08-1994
			DE 69010712 T2	12-01-1995
			EP 0384829 A1	29-08-1990
			JP 2273496 A	07-11-1990
EP 0820178	A	21-01-1998	US 5943624 A	24-08-1999
			EP 0820178 A2	21-01-1998
			JP 10098542 A	14-04-1998
US 5553314	A	03-09-1996	NONE	
GB 2321551	A	29-07-1998	GB 2311399 A	24-09-1997
GB 2331889	A	02-06-1999	JP 11163989 A	18-06-1999
			AU 9422398 A	17-06-1999
WO 9858509	A	23-12-1998	WO 9858509 A1	23-12-1998
			AT 215291 T	15-04-2002
			AT 212774 T	15-02-2002
			AU 736350 B2	26-07-2001
			AU 3022497 A	04-01-1999
			AU 739465 B2	11-10-2001
			AU 5649598 A	04-01-1999
			WO 9858510 A1	23-12-1998
			CN 1260939 T	19-07-2000
			DE 59706821 D1	02-05-2002
			DE 59802969 D1	14-03-2002
			DK 990355 T3	01-07-2002
			DK 990356 T3	29-04-2002
			EP 0990355 A1	05-04-2000
			EP 0990356 A1	05-04-2000
			HU 0003157 A2	29-01-2001
			HU 0003565 A2	28-03-2001
			JP 2002511217 T	09-04-2002
			JP 2002510444 T	02-04-2002
			NO 996145 A	16-02-2000
			NO 996148 A	11-02-2000
			NZ 501858 A	28-09-2001

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 2002/071311 A3

(51) International Patent Classification⁷: H04M 1/02,
1/725, H05B 33/14

(21) International Application Number:
PCT/EP2001/002571

(22) International Filing Date: 7 March 2001 (07.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: HALPERN, John, W. [GB/GB]; 15 Jordan
Court, Ingram Crescent West, Hove, East Sussex BN3
5NU (GB).

(74) Agent: HUGHES, Andrea, Michelle; Frank B. Dehn &
Co., 179 Queen Victoria Street, London EC4V 4EL (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility

model), DE, DK (utility model), DK, DM, DZ, EE (utility
model), EE, ES, FI (utility model), FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK
(utility model), SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US,
UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(88) Date of publication of the international search report:
21 November 2002

(48) Date of publication of this corrected version:
26 February 2004

[Continued on next page]

(54) Title: MOBILE PHONE COMMUNICATIONS SYSTEM WITH INCREASED FUNCTIONALITY

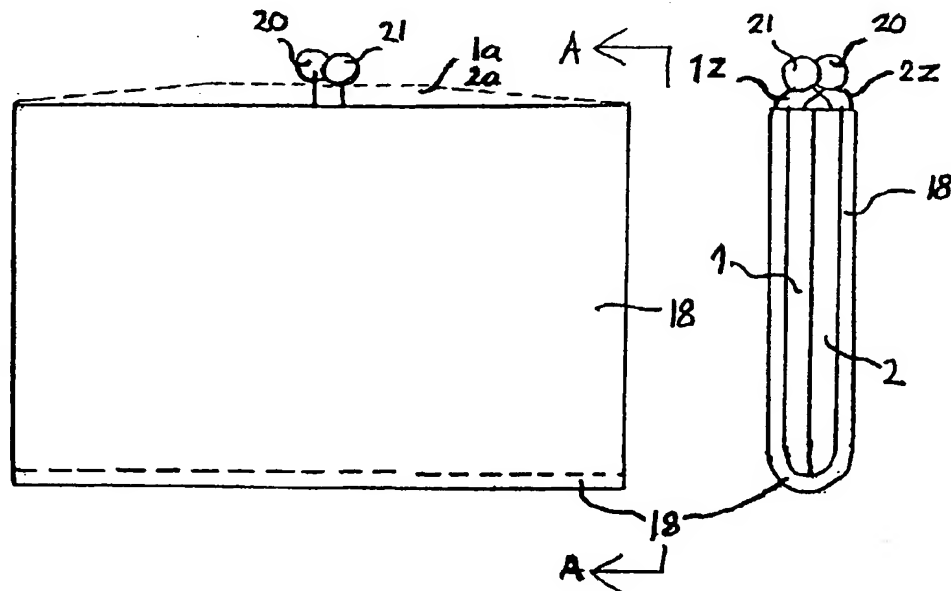

(57) Abstract: The invention relates to a mobile telephone and a smart card transaction system in combination, where the functionality of a mobile telephone is increased so that the phone can be used in a large range of transactions for which smart cards are normally used. The phone may also be provided with a slot to receive smart cards and re-charge them with funds for cashless transactions, by communicating with a bank account or the like.

WO 2002/071311 A3



(15) Information about Correction:

see PCT Gazette No. 09/2004 of 26 February 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.